
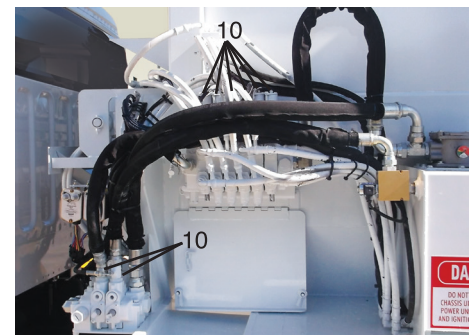


AUTOMATED SIDE LOADER Service Requirements

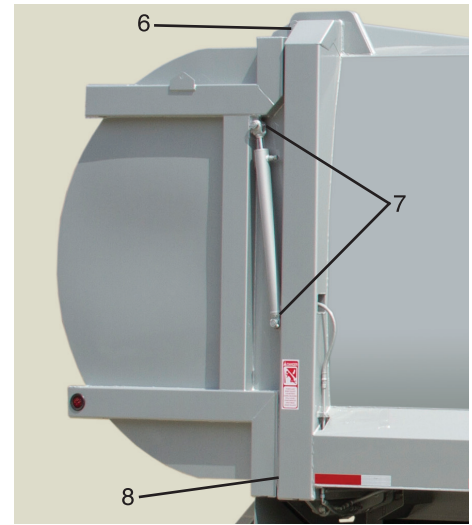

ITEM	REQUIRED SERVICE
1A. top shaft rotator linkage	three fittings (grease weekly)
1B. bucket cylinder top	one fitting (grease weekly)
2A. bucket cylinder bottom	one fitting (grease weekly)
2B. long link arm	two fittings (grease weekly)
3. long link arm	two fittings (grease weekly)
4. top shaft retainer bushings	six fittings (grease weekly)
5. lift rollers	one fitting on each roller—two per side (grease weekly)
6. tailgate hinge	one fitting per hinge—two hinges per body (grease monthly)
7. tailgate cylinders	two fittings per cylinder—two cylinders per body (grease monthly)
8. tailgate locks	one fitting per lock—one lock each side of body (grease monthly)
9. inter slide end roller	one fitting per roller—one roller each side of slide (grease monthly)
10. air shift assembly on hydraulic valves	two to three drops of CatOil (air tool lubricant) in each port every 300 hours

**For parts sales
 and service contact**
 Jeff Dunmyer
 814.445.5866 Ext. 107
 jeff@g-sproducts.com